



Flat dies machines for screws and special threads

multifunction **RP10 LD/CR/SM3**





with bushing loader **CR** and **SM3** pointing machine

See related schedules for technical specifications

Machines obtained from the combination of different modules, allowing for example the implementation of pointing, washer loading and final screw threading in a single step without having to load and unload parts to be worked, since all processing takes place in tandem. This allows user customers to perform further processing simultaneously to threading/rolling

operations. Reducing production times increases the profit margin on the final product. Different module combinations are available according to the processing to be obtained on the final product. Each module is bypassable so as to exclude any unnecessary processing.

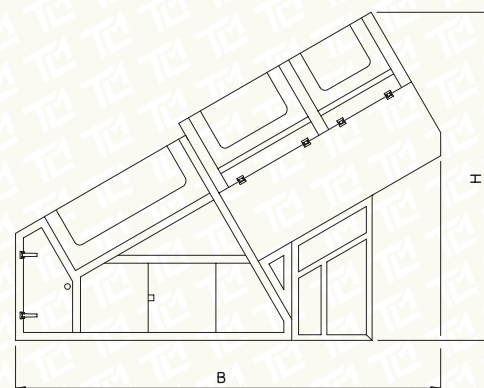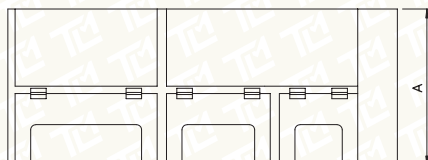

Technical features: approximate values. The machine speed can change according to the material used and the type of item to be rolled. Measures in mm.

Output capacity	Diameter of screw	Length of thread	Max length of shank underhead	Standard tool sizes	Total power of motors	Net weight approx	Machine Sizes (without CR)	Machine sizes with hood for total soundproofing (without CR)
min 100 max 320	min 4 max 10	min 15 max 65	130	150x170x80 Sp.35	HP 16	Kg. 3650	2500x1300 x1800	A 1505 – B 3756 H 2900