Multifunction machines

with pointing machine RP8 LD + SM2

Dual punch threading machines

Controlled by two slides. These are defined as dual feeding machines obtained by means of a combination of 2 slides and 1 separator unit with the following functions:

- the separator unit, that closes and supports the screw column,
- the 1st slide, called the positioner, brings the screw to the starting position,
- the 2nd slide, called the feeder, feeds the screw parallel to the rolling dies.

This system prevents overlapping of rivet shanks.

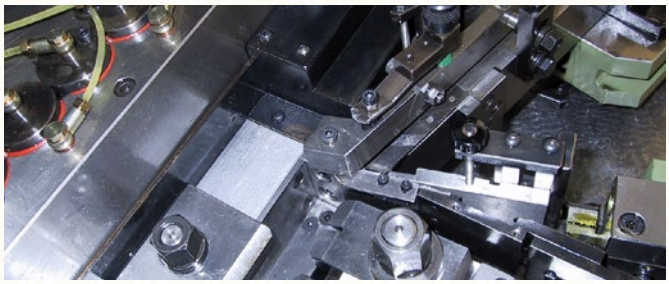

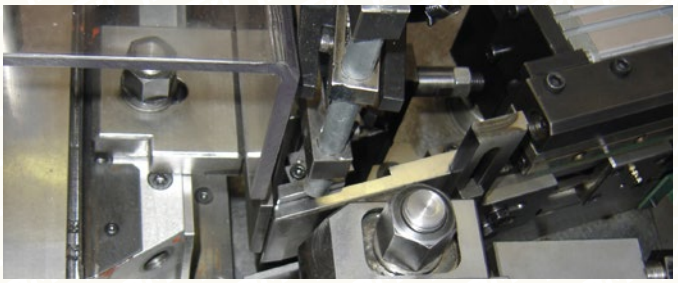

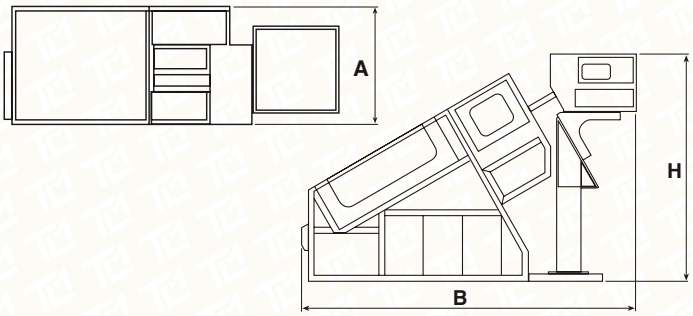

Technical features: approximate values. The machine speed can change according to the material used and the type of item to be rolled. Measures in mm.

RP8

Output capacity	Diameter of screw	Length of thread	Max length of shank underhead	Standard tool sizes	Total power of motors
min 80 max 380	min 4 max 8	min 10 max 50	90	150x170x54 Sp.30	HP 12,5

SM2

Output capacity	Diameter of screw	Min. length	Max length
max 265	min 4 max 8	16	82

Machine sizes with hood for total soundproofing
A 1230 - B 3535 - H 2379

T.L.M. srl viale Mariano Dellepiane, 10/L 15057 Tortona (AL) ITALY tel+39 0131 813043 fax+39 0131 814456 info@tlmweb.it www.tlmweb.it