# Multifunction machines

# RP16 + RS16 + LB900

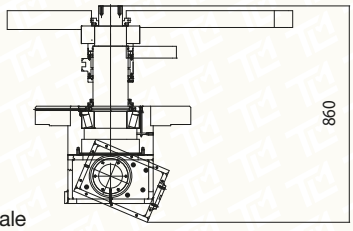


1:30 scale

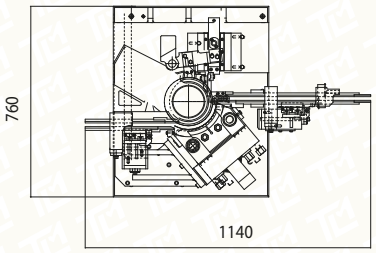

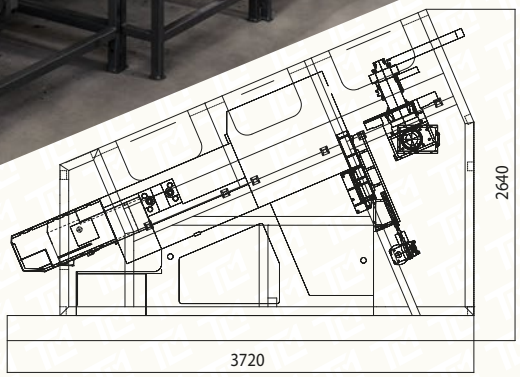


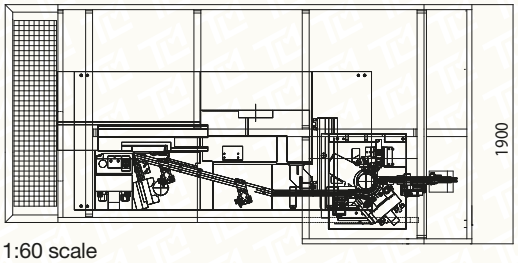


1:60 scale

**Technical features: approximate values.** The machine speed can change according to the material used and the type of item to be rolled. Measures in mm.

**Roll and segment rolling machine RS16**

| Output capacity | Screw diameter | Thread length | Max length of shank underhead | Standard tools size | Special tools size | Total motors power | Net weight approx | Machine sizes |
|---|---|---|---|---|---|---|---|---|
| min 70<br>max 500 | min 6<br>max 16 | min 20<br>max 100 | 150 | roll Ø 127<br>sector Ø 340<br>H 100 | on request | HP 20 | Kg 4000 | A 760 - B 1140<br>H 860 |

**Flat dies machine RP16 S**

| Output capacity | Screw diameter | Thread length | Max length of shank underhead | Standard tools size | Special tools size | Total motors power | Net weight approx | Machine size without soundproof hood |
|---|---|---|---|---|---|---|---|---|
| min 60<br>max 160 | min 8<br>max 16 | min 20<br>max 120 | 140 / 180 | 228,6 x 254<br>x 42,8 H130 | on request | HP 25 | Kg 6300 | A 1500 - B 3500<br>H 1950 |

T.L.M. srl viale Mariano Dellepiane, 10/L 15057 Tortona (AL) ITALY tel+39 0131 813043 fax+39 0131 814456 info@tlmweb.it www.tlmweb.it